

Features

- Drainage pump
- Faster pumping for larger tanks
- Dual mechanical seal
- Thermal protection
- Motor protection IP68
- Insulation class F
- Maximum immersion depth 5m

Performance

- Capacity up to 72 m³/h
- Manometric Head up to 20 m
- Maximum content in sand 100 gr/m³




ASTRA GX 2200

Applications

- Small tanks
- Garage
- Basement
- Construction buildings


Materials

- Motor casing made of stainl. steel AISI 304
- Shaft made of stainless steel AISI 304
- Impeller made of cast iron
- Pump casing made of cast iron

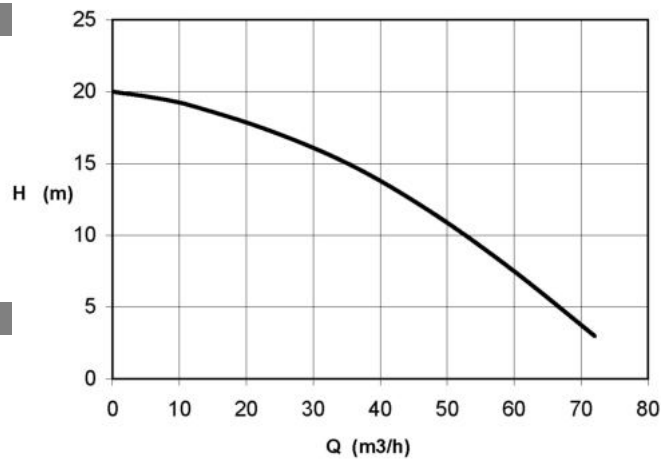

TYPE	VOLT	POWER kW	m ³ /h	0,5	6	12	24	36	48	60	72
			l/min	8,3	100	200	400	600	800	1000	1200
Astra GX 2200	400V	2,2	H (m)	20	19,6	19	17,2	14,8	11,5	7,5	3

Dimensions

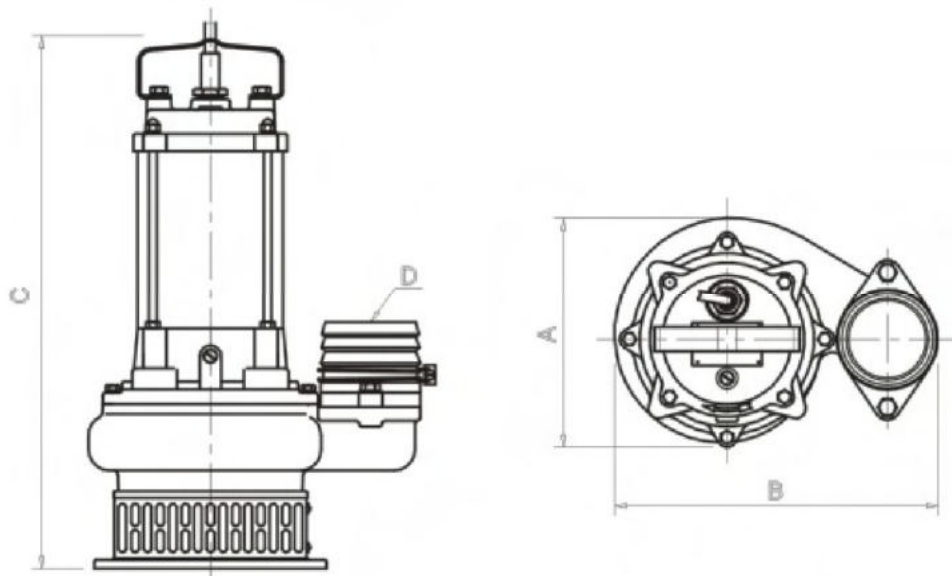

TYPE	A (mm)	B (mm)	C (mm)	D Discharge	Weight
Astra GX 2200	240	340	580	3"	40kg