

Features

- Sewage water pump
- Dual mechanical seal
- Thermal protection
- Motor protection IP68
- Insulation class F
- Maximum immersion depth 5m

Performance

- Capacity up to 84 m³/h
- Manometric Head up to 20 m
- Max. diameter of incoming particles 50 mm

Applications


- Hotels
- Municipalities
- Biological stations
- Professional sewage pumping

Υλικά

- Motor casing made of stainl. steel AISI 304
- Shaft made of stainless steel AISI 420
- Impeller made of cast iron
- Pump casing made of cast iron




Argo GS

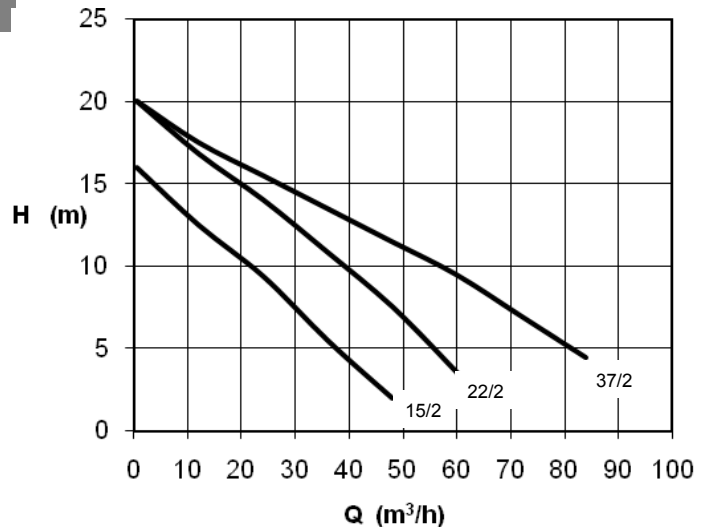

TYPE	VOLT	MOTOR KW	PARTICLES MAX DIAMETER	m ³ /h l/min	0,5	12	24	36	48	60	72	84
					8,3	200	400	600	800	1000	1200	1400
Argo GS 15/2	400V	1,5	50mm	H (m)	16	12,5	9,4	5,5	2			
Argo GS 22/2	400V	2,2	50mm		20	16,8	14	10,8	7,5	3,5		
Argo GS 37/2	400V	3,7	50mm		20	17,5	15,5	13,5	11,5	9,5	7	4,5

Dimensions

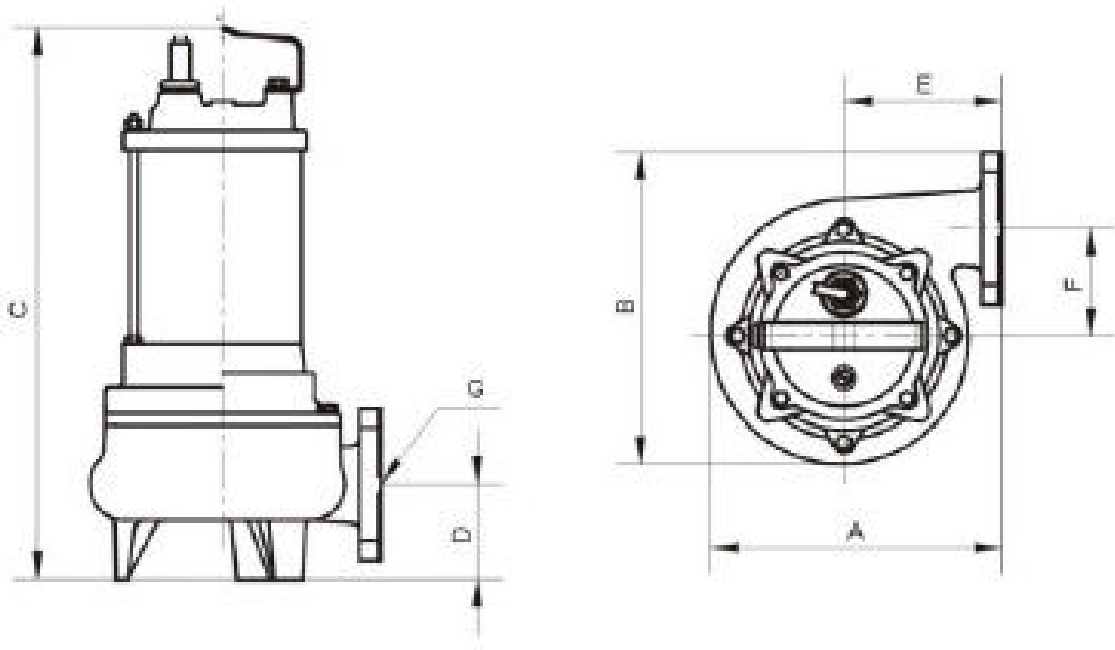

TYPE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G Discharge	Weight
Argo GS 15/2	280	300	530	90	150	102	DN65	44kg
Argo GS 22/2	280	300	550	90	150	102	DN65	46kg
Argo GS 37/2	305	250	615	105	180	0	DN80	50kg