

### Features

- Drainage pump
- Light construction made of technopolymere
- Thermal protection
- Hand/auto switch for both manual and automatic operation
- Fitted water level sensor
- Motor protection IP68
- Insulation class F
- Maximum immersion depth 5m
- Discharge can be on top for clear water or on side for clean and dirty water
- Factory discharge setting is on side
- 10m cable with



### Performance

- Capacity up to 12 m<sup>3</sup>/h
- Manometric Head up to 8,5 m
- Maximum content in sand 100 gr/m<sup>3</sup>


### *ASTRA N 750F*

### Applications

- Small tanks
- Garage
- Basement



### Materials

- Motor casing made of technopolymere
- Shaft made of stainless steel AISI 420
- Impeller made of technopolymere
- Pump casing made of technopolymere

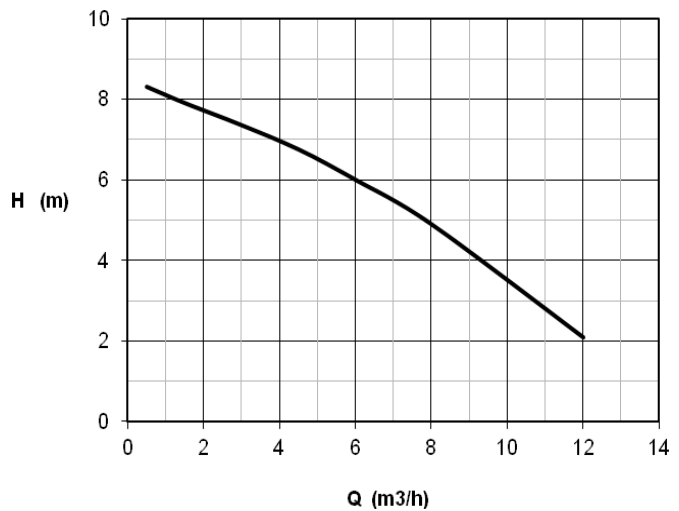

| TYPE         | VOLTAGE | POWER kW | m <sup>3</sup> /h |     |     |     |     |     |
|--------------|---------|----------|-------------------|-----|-----|-----|-----|-----|
|              |         |          | 0,5               | 3   | 6   | 9   | 12  |     |
| Astra N 750F | 220V    | 0,75     | l/min             | 8,3 | 50  | 100 | 150 | 200 |
|              |         |          | H (m)             | 8,3 | 7,4 | 6   | 4,3 | 2,1 |

Dimensions

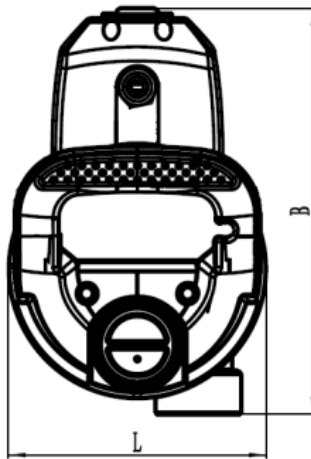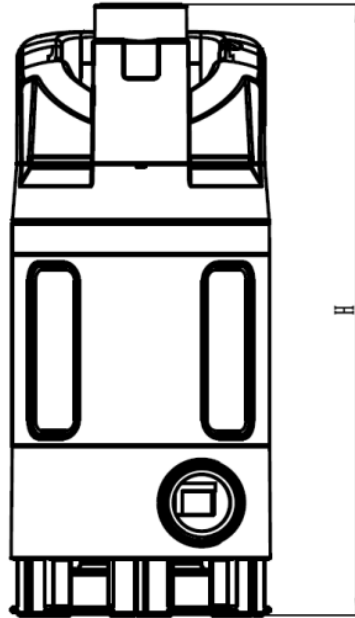

| TYPE         | L<br>(mm) | B<br>(mm) | H<br>(mm) | C<br>Discharge | Weight |
|--------------|-----------|-----------|-----------|----------------|--------|
| Astra N 750F | 148       | 232       | 332       | 1" 1/4         | 4,9kg  |