

Features

- Stainless steel drainage pump
- Internal motor cooling for longer life lasting
- Dual mechanical seal
- Thermal protection
- Float switch
- Motor protection IP68
- Insulation class F
- Maximum immersion depth 5m

Performance

- Capacity up to 18 m³/h
- Manometric Head up to 14 m
- Maximum content in sand 100 gr/m³

Εφαρμογές


- Small tanks
- Garage
- Basement

Υλικά

- Motor casing made of stainl. steel AISI 304
- Shaft made of stainless steel AISI 304
- Impeller made of stainless steel AISI 304
- Pump casing made of stainl. steel AISI 304




ASTRA X

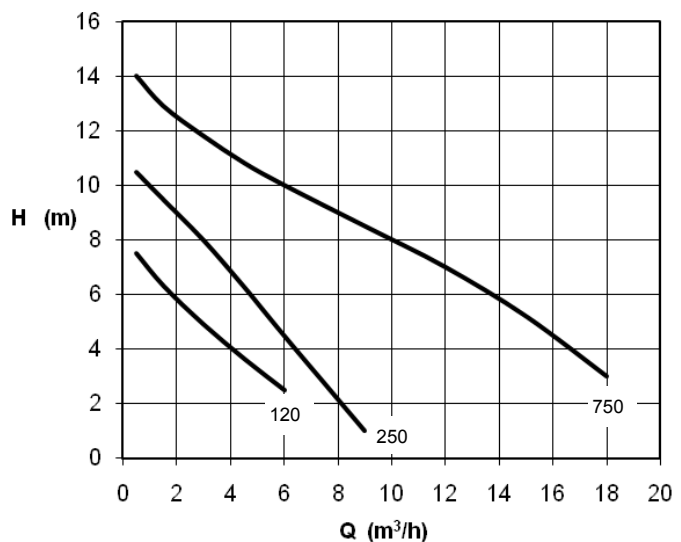

TYPE	VOLT	POWER kW	m ³ /h l/min	0,5	1,5	3	4,5	6	9	12	15	18
				7,5	6,2	4,9	3,6	2,5				
Astra X 120	220V	0,12	H (m)	7,5	6,2	4,9	3,6	2,5				
Astra X 250	220V	0,25		10,5	9,5	8	6,3	4,5	1			
Astra X 750	220V	0,75		14	12,8	11,8	10,8	10	8,5	7	5,2	3

Dimensions

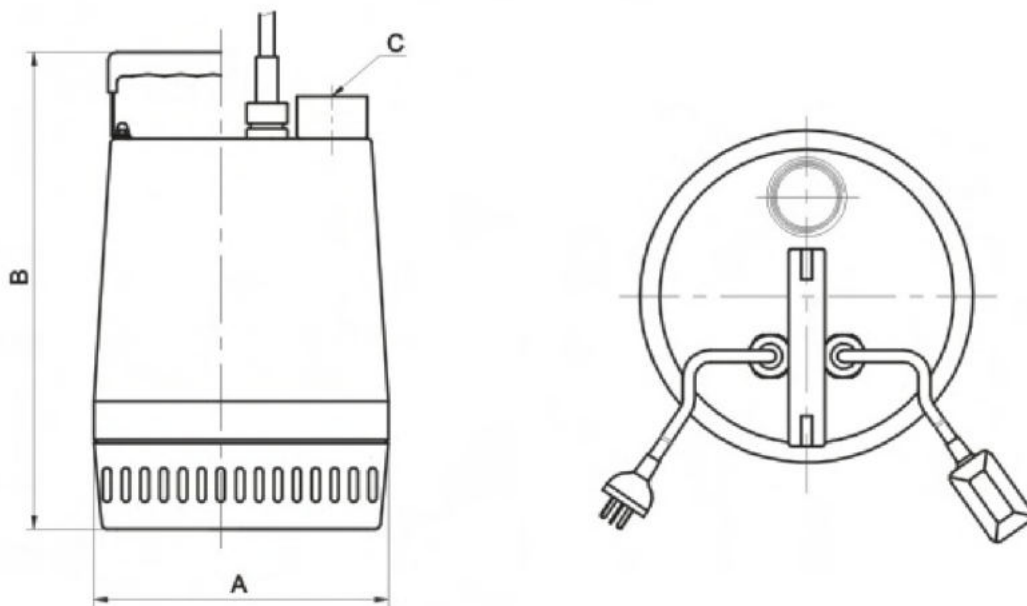

TYPE	A (mm)	B (mm)	C Discharge	Weight
Astra X 120	130	280	1''1/4	6Kg
Astra X 250	150	280	1''1/4	6Kg
Astra X 750	220	380	1''1/2	17Kg