

Features

- Single stage centrifugal pump
- Dual mechanical seal
- Thermal protection
- Motor protection IP54
- Insulation class F
- Maximum suction depth 7m

Performance

- Capacity up to 14 m³/h.
- Manometric Head up to 37 m.
- Maximum diameter of incoming particles 3 mm
- Revolution speed 2900 r.p.m.

Applications


- Domestic or building use.
- Water transfer from wells or tanks.
- Garden irrigation.
- Combined with inverter
- Combined with pressure tank

Materials

- Motor casing made of aluminum.
- Shaft made of stainless steel AISI 304.
- Impeller made of bronze.
- Pump casing made of cast iron.




CDR

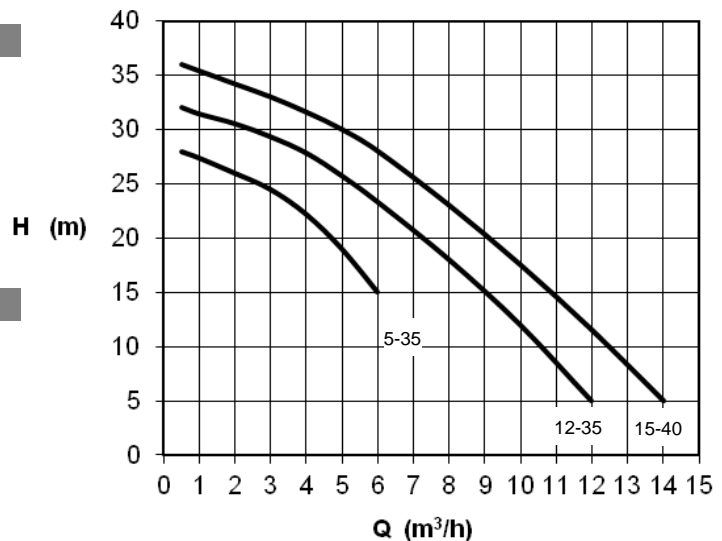

TYPE	VOLT	MOTOR KW	m ³ /h	0,5	1	2	3	4	5	6	8	10	12
			l/min	8,3	16,7	33,3	50	66,6	83,3	100	133,3	166,6	200
CDR 5-35	220V	0,75	H (m)	28	27,4	26	24,5	22,2	19	15			
CDR 12-35		1,1		32	31,4	30,5	29,3	27,8	25,7	23,3	18	12	5
CDR 15-40		1,5		36	35,4	34,2	33	31,6	30	28	23	17,5	11,5

Dimensions

CDR

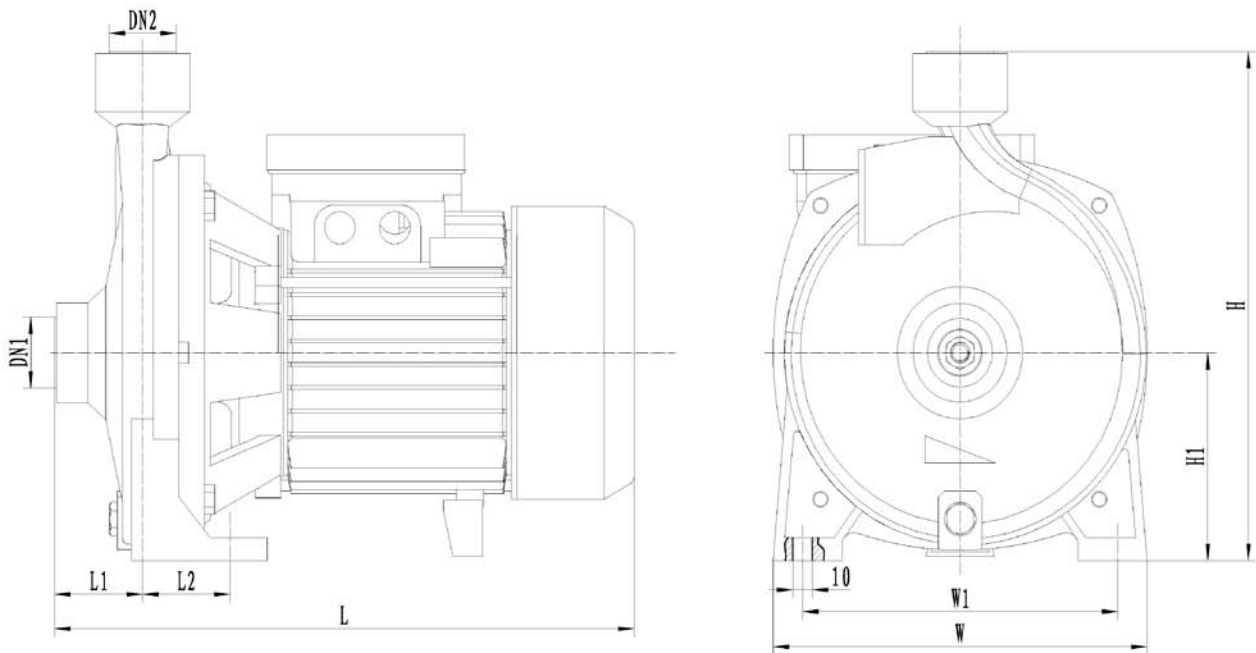

TYPE	L (mm)	W (mm)	H (mm)	L1 (mm)	L2 (mm)	H1 (mm)	W1 (mm)	DN1	DN2	Weight
CDR 5-35	294	190	245	45	44	100	190	1"	1"	12kg
CDR 12-35	364	206	261	56.5	28	106	148	1"1/2	1"	17,5kg
CDR 15-40	364	206	261	56.5	28	106	148	1"1/2	1"	19,5kg