

### Features

- Peripheral pump
- Dual mechanical seal.
- Thermal protection.
- Motor protection IP44.
- Insulation class F.
- Maximum suction depth 7m.

### Performance

- Capacity up to 2,5 m<sup>3</sup>/h.
- Manometric Head up to 43 m.
- Maximum diameter of incoming particles 3 mm
- Revolution speed 2900 r.p.m.

### Applications


- Domestic or building use.
- Water transfer from wells or tanks.
- Garden irrigation.
- Combined with inverter.
- Combined with pressure tank.

### Materials

- Motor casing made of aluminum.
- Shaft made of stainless steel AISI 304
- Impeller made of bronze.
- Pump casing made of cast iron




**PK 40**

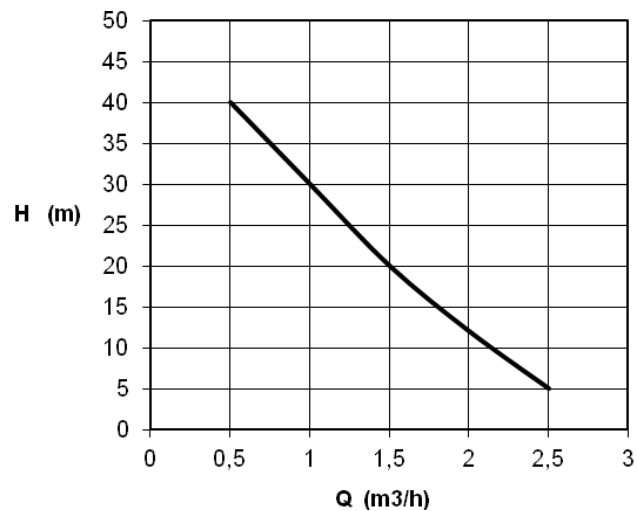

TYPE	VOLT	MOTOR Watt	m <sup>3</sup> /h	0,5	1	1,5	2	2,5
			l/min	8,3	16,7	25	33,3	41,7
<b>PK 40</b>	220V	290	H (m)	40	30	20	12	5

## Dimensions

### PK 40

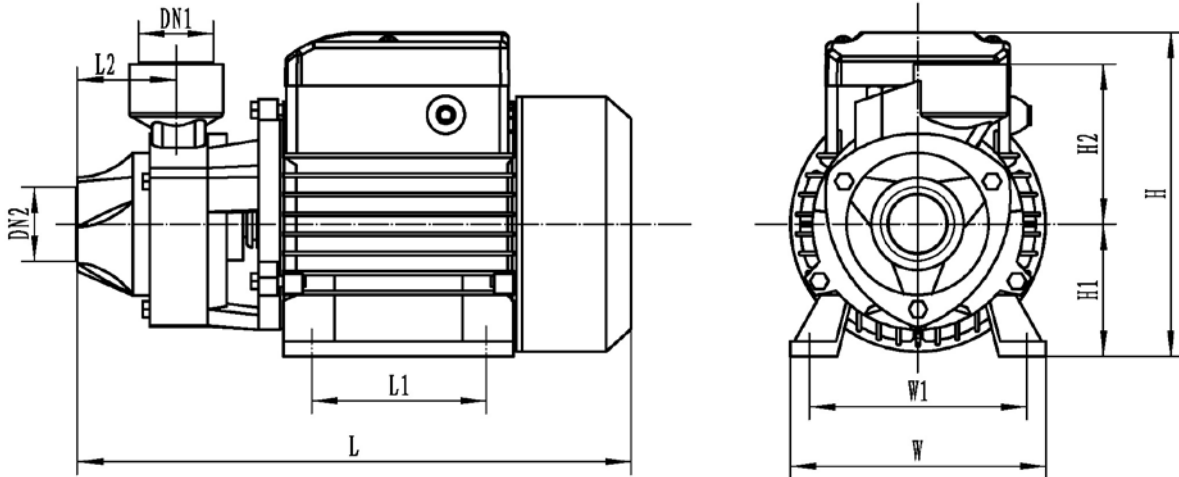

TYPE	L (mm)	W (mm)	H (mm)	L1 (mm)	L2 (mm)	W1 (mm)	H1 (mm)	H2 (mm)	DN1	DN2	Weight
PK 40	257	120	153	80	46	100	63	75	1"	1"	7kg